


PS101-48130-00

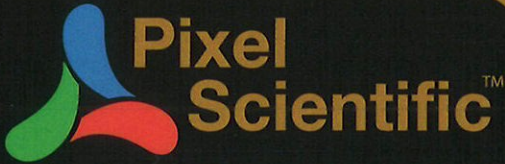


Pixel Scientific, Inc.
4 Carbonero Way | Suite B
Scotts Valley, CA 95066
Phone: 408-659-4630
www.pixelscientific.com

Custom Displays

Key Features:

- Sunlight Readable
- Custom Sized LCD
- LED Backlight
- Low Power Consumption
- Slim Bezel Design
- Long Life Expectancy

This is an innovative, ultra-wide, sunlight readable, LED Backlight, TFT LCD display. It is a high color saturation display intended for wide stretch applications, digital signage, digital signage, public transportation, exhibition hall, department store, and industrial applications. The monitor has options for a standard host PC interface. It can be used in many applications requiring high brightness, sunlight readable, high-quality video and energy-efficiency.

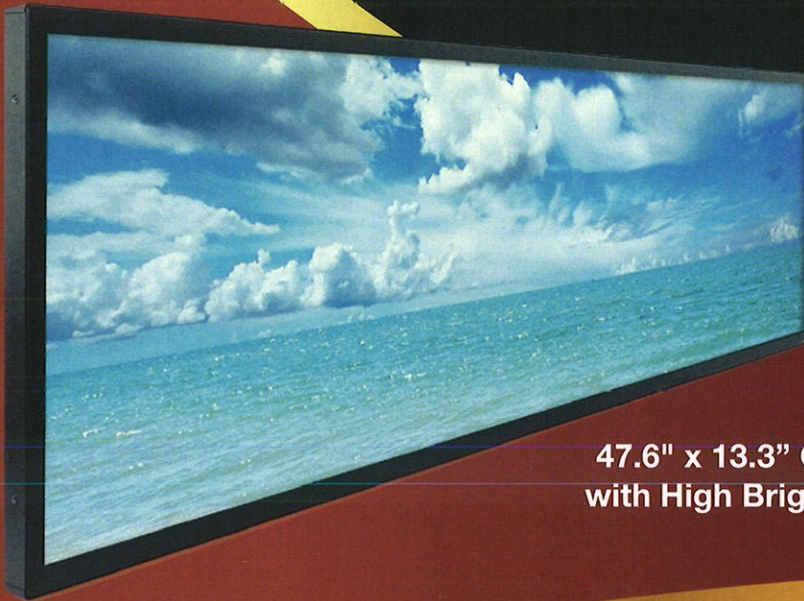

47.6" x 13.3" Custom Sized AMLCD
with High Bright Backlight 1920 x 538

Description: 47.6" x 13.3" Custom Sized AMLCD with LED Backlight 1920 x 538

Display Area (mm)	1209.6(H) x 338.9(V)	Response Time	6.5 ms
Brightness:	1200 cd/m ²	LCD Interface	LVDS
Resolution	1920 x 538	Operating Temperature	(0°C ~ 50°C)
Aspect Ratio	16:4.5	Storage Temperature	(-20°C ~ 60°C)
Contrast Ratio	9700:1	Power Consumption	93W
Pixel Pitch	630 µm	Dimensions (mm)	1244(W) x 378.7(H) x 27.6(D))
Viewing Angle	178°(H), 178°(V)	LED Driver	Optional
Color Saturation	78%	Controller Interface	Optional VGA + DVI + HDMI
Display Colour	16.7M	OSD Button	Power Switch, Menu, Select (+,-)