




Pixel Scientific, Inc.
 4 Carbonero Way | Suite B
 Scotts Valley, CA 95066
 Phone: 408-659-4630
 www.pixelscientific.com

Custom Displays

Key Features:

- Sunlight Readable
- Custom Sized LCD
- LED Backlight
- Low Power Consumption
- Slim Bezel Design
- Long Life Expectancy

This is an innovative, ultra-wide, sunlight readable, LED Backlight, TFT LCD display. It is a 4k resolution, high color saturation display intended for wide stretch applications, digital signage, digital signage, public transportation, exhibition hall, department store, and industrial applications. The monitor has options for a standard host PC interface. It can be used in many applications requiring high brightness, sunlight readable, high-quality video and energy-efficiency.

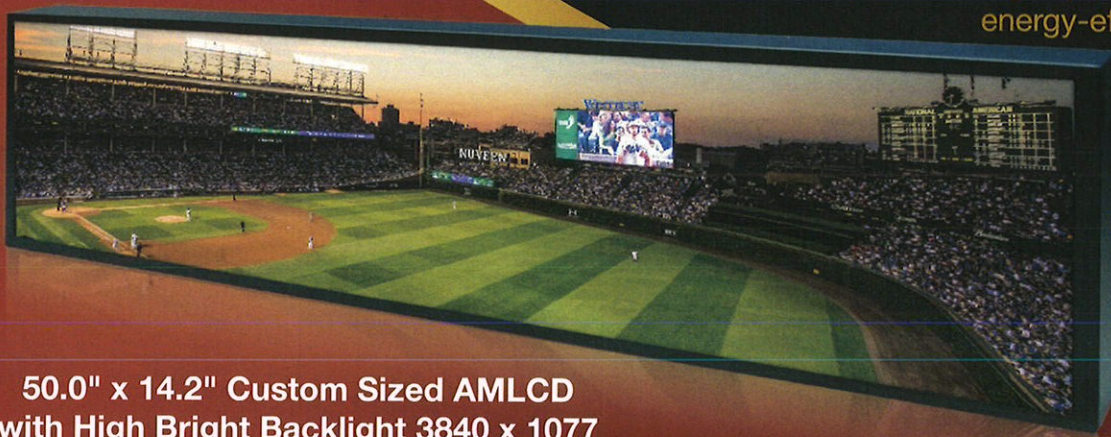

50.0" x 14.2" Custom Sized AMLCD
 with High Bright Backlight 3840 x 1077

Description: 50.0"x14.2" Custom Sized AMLCD with LED Backlight 3840 x 1077

Display Area (mm)	1270(H) x 360(V)
Brightness	1400 cd/m ²
Resolution	3840 x 1077
Aspect Ratio	16:4.5
Contrast Ratio	6000:1
Pixel Pitch	330 μm
Viewing Angle	178°(H), 178°(V)
Color Saturation	94%
Display Colour	1.07G

Response Time	9.5 ms
LCD Interface	V-by-One
Operating Temperature	(0°C ~ 50°C)
Storage Temperature	(-20°C ~ 60°C)
Power Consumption	134W
Dimensions (mm)	1121.7(W) x 338.9(H) x 21.6(D)
LED Driver	Optional
Controller Interface	Optional VGA+DVI+HDMI
OSD Button	Power Switch, Menu, Select (+,-)